

Recommended PCB layout:

Material

Contact:

RJ Contact : T=0.30mm Phosphor Bronze Gold FLASH

USB Contact: T=0.30mm C2680-H Gold FLASH



Plating Over Nickel

Shielded:


Front shell: SUS201 1 / 4H T=0.15mm

Back shell: SUS201 1 / 4H T=0.20mm

HOUSING: PBT + 30%G.F., BLACK, UL94V-0

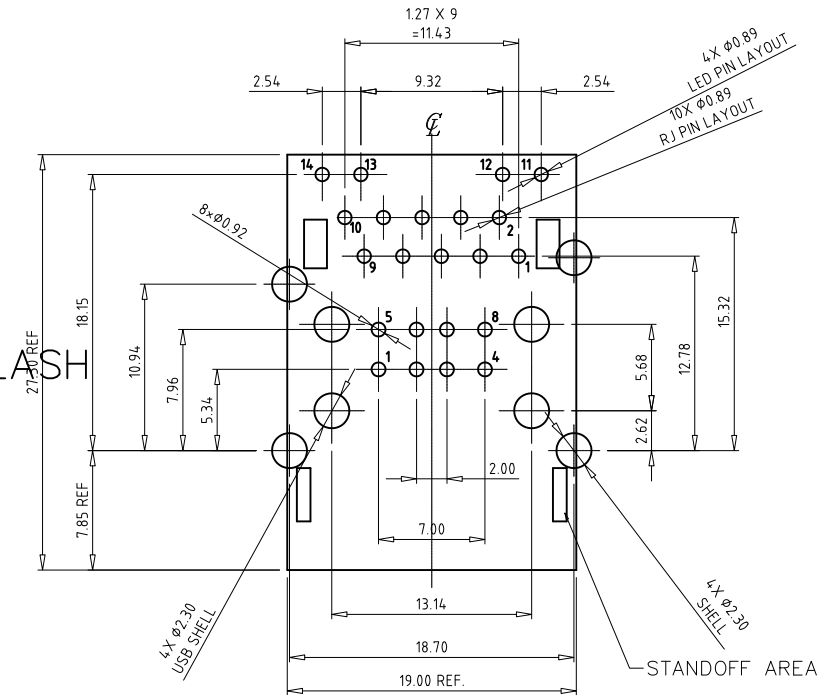

Green



TOLERANCES
EXCEP AS NOTED

30~	±0.40
10~30	±0.30
0~10	±0.15
ANGLES	±1°

TITLE:

RJ45 W/Transformer W/Dual USB(GIGA)

				SCALE	DATE.	DRAWING BY	Hill	P/N	ARBU-ADBB-XC725-A
				2:1	09/06/03	CHECKED BY	Hill	DRAWING NO.	
A.	new release	09/06/03	ELLAX				APPROVED BY	UNIT	mm
REV.	DESCRIPTION	date.						PAGE	20F3